




Engineering and Manufacturing services

47745 - 193rd St. Toronto, SD 57268 USA

(605) 794-2072 (P) emssensors.com

Temperature and Humidity Dual Transmitter

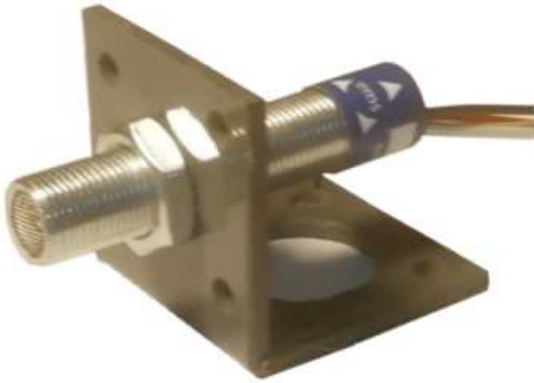

THX103 - 0-5V - \$50

Power = +10-28VDC Red(+) Black (-)

Leads = 6" long

Humidity output (White)


0-100% (0=0.5v / 100=4.5V)

Accuracy = +/- 2%

Temperature output (Yellow)

-49-251 (-49F=0.5V / 251F=4.5V)

Accuracy = +/- 1F

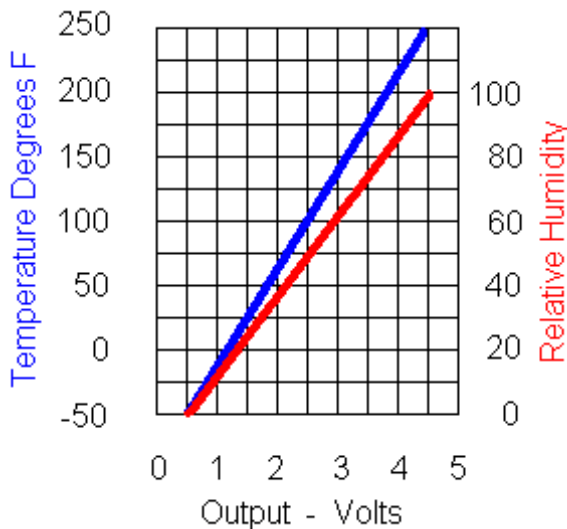

12x1mm threaded

2.35"

